



Revenue Grade Rope CT by AccuEnergy

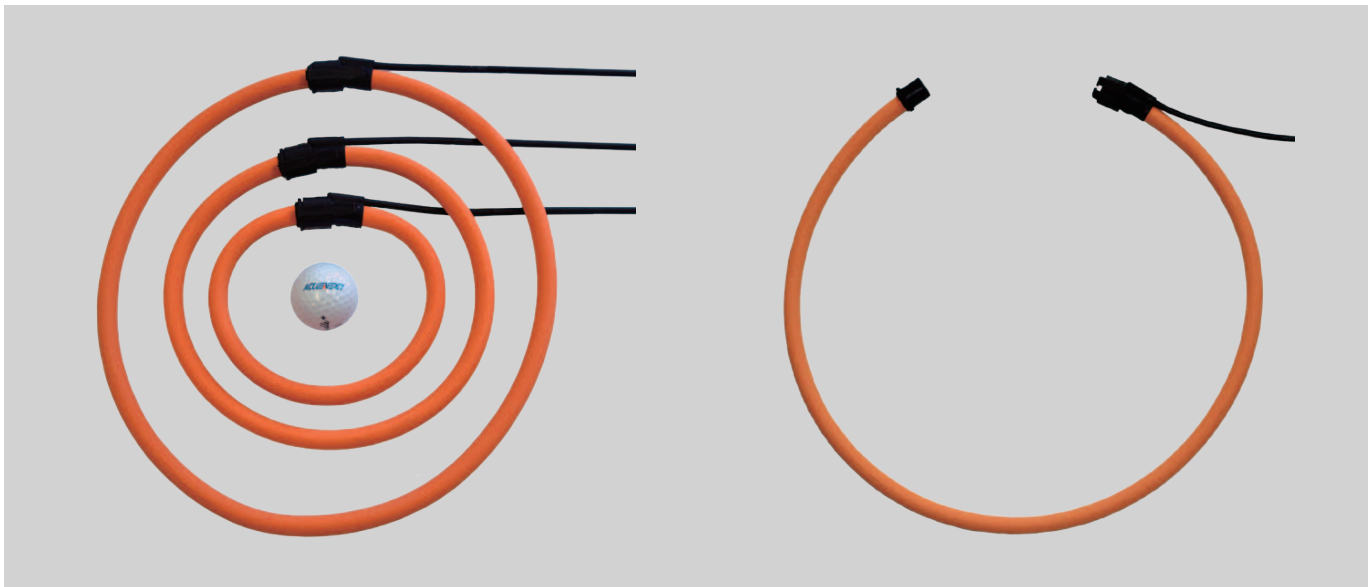

AccuEnergy's flexible revenue grade Rope CT is designed for use where regular solid or split core current transformers cannot fit, and is ideal for power quality monitoring such as harmonics. Advantages of the Rogowski coil include: high accuracy, wide measurement and frequency range with no additional integrator or power supply needed when used with AccuEnergy's AccuVim II, Measurllogic's DTS-310 and DTS-307, and eGauge.

SPECIFICATION

Window Size	106mm (4.17"), 178mm (7.01"), 271mm (10.67"), 369mm (14.53")
Length of Coil	400mm (15.75"), 600mm (23.62"), 900mm (35.43"), 1200mm (47.24")
Current Input Ranges*	5A-50000A
Output	120mV/1000A @ 60 Hz; 100mV/1000A @ 50 Hz
Frequency Range	20Hz - 5kHz
Accuracy	0.5% at any point
Leads	White-Positive, Brown-Negative, Bare-Shield; 24AWG
Polarity	Arrow Towards Load (Current Flow Direction)
Operating Temperature	-20°C - 70°C
Temperature Drift	+/- 0.07% Within Operating Temperature Range
Material	Orange Thermoplastic Rubber, Flame Retardant UL 94 V-0 Rated
Dielectric Strength	7400Vac @ 50/60Hz for 1 Minute

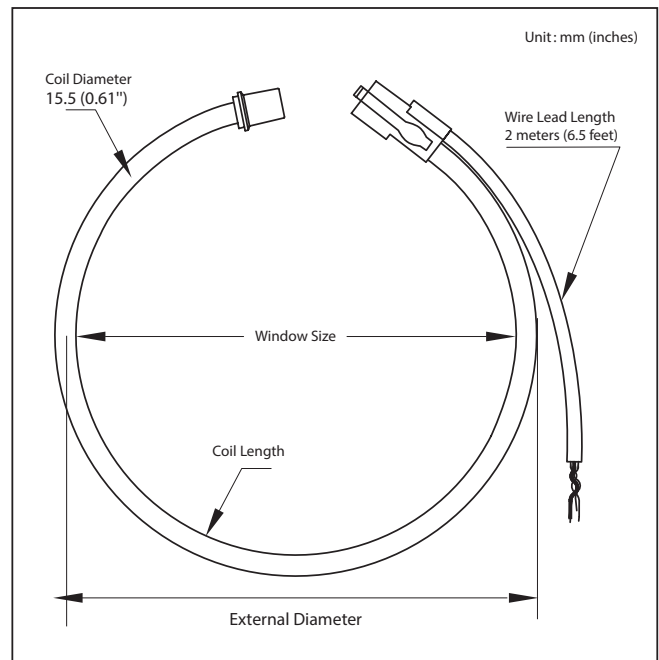

Dimensions mm (Inch)	RCT16	RCT24	RCT36	RCT47
Window Size	106 (4.17")	178 (7.01")	271 (10.67")	369 (14.53")
Coil Length	400mm (15.75")	600mm (23.62")	900mm (35.43")	1200mm (47.24")
External Diameter	143 (5.63")	207 (8.13")	302 (11.89")	398 (15.66")
Coil Diameter	15.5 (0.61")			
Wire Lead Length	2 meters (6.5 feet)			

*Note: When ordering the AccuVim II series additional information is required to measure beyond 1200A.